

# DPF 70/...-125

## Duplex Filters for the 450 MHz Band

### DESCRIPTION

- High power base station duplex filters for the 400 – 475 MHz range.
- The use of large  $\varnothing 125$  mm cavities means a high Q, resulting in a very small duplex spacing.
- The large dimensions also mean a high power rating.
- High frequency stability on temperature and power.
- Mounting brackets for 19" mounting included.
- Please specify the frequencies for TX and RX when ordering.




### ORDERING DESIGNATIONS

TYPE	PRODUCT NO.
DPF 70/22-125	200000271
DPF 70/33-125	200000287
DPF 70/44-125	200000435


### SPECIFICATIONS

ELECTRICAL		
MODEL	DPF 70/22-125	DPF 70/33-125
FREQ. RANGE	400 - 470 MHz	400 - 470 MHz
MAX. INPUT POWER	250 W @ 1 dB IL	250 W @ 1.5 dB IL
MIN. DUPLEX SPACING	0.5 MHz	0.5 MHz
TYP. INSERTION LOSS	0.5 MHz: 1 dB 1 MHz: 0.8 dB	0.5 MHz: 1.2 dB 1 MHz: 1.0 dB
ATTENUATION	0.5 MHz: 58 dB 1 MHz: 63 dB	0.5 MHz: 85 dB 1 MHz: 90 dB
IMPEDANCE	Nom. 50 $\Omega$	Nom. 50 $\Omega$
SWR	$\leq 1.5$	$\leq 1.5$
MECHANICAL		
TEMP. RANGE	-30° C $\rightarrow$ +60° C	-30° C $\rightarrow$ +60° C
FREQ. STABILITY	Approx. 0.8 ppm/° C	Approx. 0.8 ppm/° C
CONNECTORS	N-female	N-female
DIMENSIONS (L x W x H)	260 x 483 x 300(400) mm	260 x 483 x 300(400) mm
WEIGHT	Approx. 7 kg	Approx. 8.6 kg

### TYPICAL RESPONSE CURVES @ 2 MHz DUPLEX SPACING

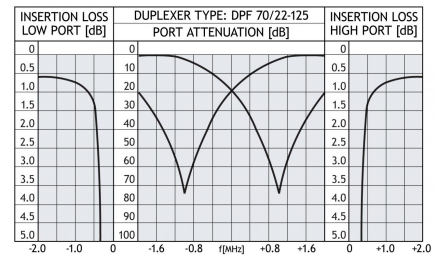

### TYPICAL RESPONSE CURVES @ 2 MHz DUPLEX SPACING

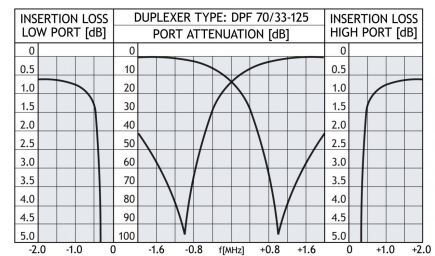

PROCOM A/S reserve the right to amend specifications without prior notice.

13/07/11